


# SPECIFICATION

# CARBON DIOXIDE FIRE EXTINGUISHER YC-3200X

**SALES** PT Urano Anzen Indonesia  
DBS Bank Tower 28/F, Ciputra World One Jl. Prof. Dr. Satrio Kav. 3-5 Kel. Karet Kuningan Kec. Setiabudi, Jakarta Selatan, Jakarta - 12940 Indonesia

**MANUFACTURER** YAMATO PROTEC CORPORATION

## CONSTRUCTION

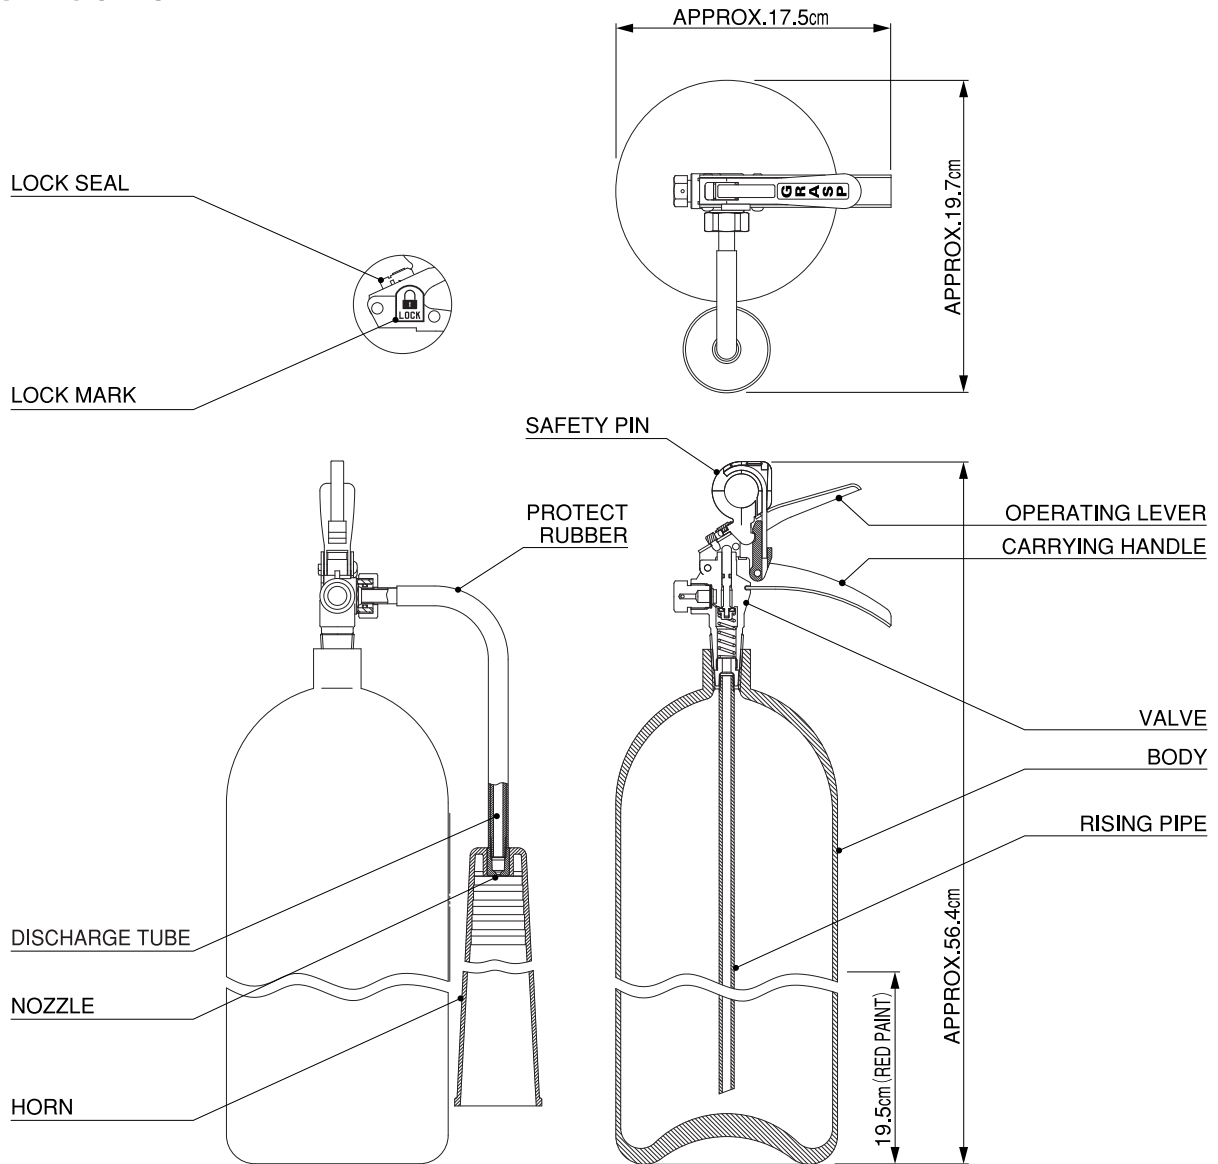

## SPECIFICATIONS

Rules	F D M A	Capacity of Body	5.0 L	Fire Rate (Japan)	B-2 · C
Gross Weight	APPROX.10.3kg	Hose Length	24cm	Service Temperature	-30°C~+40°C
Total Height	APPROX.56.4cm	Nozzle Diameter	2.3mm	Safety Valve Pressure Actuator	17.5~24.5 MPa
Diameter of Body	14cm	Discharge Duration (at 20°C)	APPROX.19sec.	Test Pressure	24.5 MPa
Thickness of Body	3.1mm	Shooting Range (at 20°C)	APPROX.2~4m	Agent Mass	3.2kg

## TO OPERATE

